

19" 1 Port HDMI LCD KVM Console (LH1901)






Overview


Kinan's LH1901 is a keyboard monitor mouse switch that integrated 19" LCD monitor, full 99-key keyboard and touchpad in a 1U height of single rail housing. The included cable allows for connection to a USB computer or KVM. Features a 19-inch LCD TFT panel, the LH1901 supports high video quality up to 1280x1024@60Hz.

The LH1901 rackmount console comes with a single HDMI port, which can be connected directly to a server or PC, or to a KVM switch to control multiple systems. The HDMI LCD KVM serves as the monitoring and managing console for standard KVM Switches.

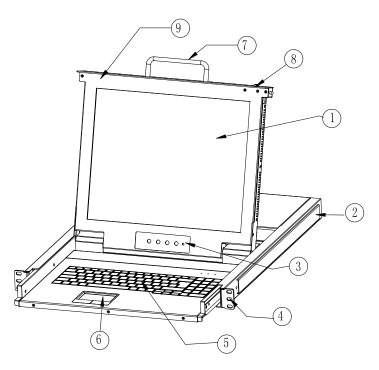


1	LCD Monitor	6	Touchpad
2	Rear Bracket Slot	7	Handle
3	Display Menu Buttons	8	Release Switch
4	Mounting Bracket	9	Display Panel
5	Keyboard		

Structure

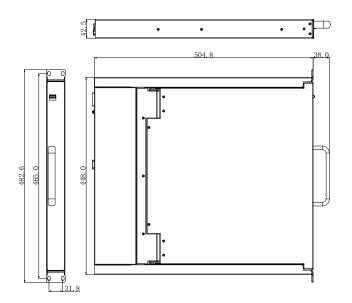



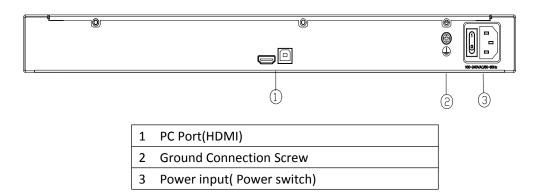

Hardware Features

- Integrated rackmount console drawer with 19" LCD rack mount monitor, keyboard/touchpad
- Standard HDMI connection-Connect to a server or computer via standard HDMI connector
- LCD module can be opened up to 108 degrees to provide a comfortable viewing angle
- Support computers with USB keyboard and mouse
- Internal power supply

High Resolution

- 19" TFT LCD kvm monitor supports highlight, high definition and high resolution
- Support input video resolutions up to 1280 x 1024 @60Hz

High Performance Touchpad

Touchpad with scroll wheel - Eliminates the need for a separate, external mouse


Keyboard

- Multi-language support--English, Russian, German, French, UK and Spanish, etc.
- Full size 99 keys keyboard with integrated number pad

Wide Compatibility

- Multiplatform Support-Compatible with Windows, Sun, Unix and Linux
- Supports servers form Lenovo, HUA WEI, HP, IBM, Cisco and Dell, etc.

Connection Diagram

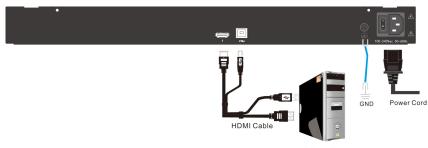

PC or Server



Package Contents

- 1x LCD Console
- 1x Power Cord (Regional)
- 1x Quick Start Guide
- 2x Mounting Rails
- 1x USB+HDMI KVM Cable (1.8m/6ft)

Specifications

Model		LH1901		
Computer Connections		1		
Port emulation Keyboard, mouse		PS/2, USB		
	LCD model	SXGA TFT		
	View area	19 "		
	Optimum resolution	1280×1024@60Hz		
LCD monitor	Display color	16.7 M		
	Brightness	250cd/m² (T y p)		
	Contrast ratio	1000: 1 (T y p)		
	Pixel pitch(mm)	0.2928(H) × 0.2928(W)		
Mouse	X/Y resolution	>1000 points / inch, (40 points/mm)		
Mouse	Scroll wheel	Support scroll wheel function		
Keyboard		99 keys (82 keys main keyboard +17 independent small numeric keyboard)		
Input power		100V – 240Vac, 50 ~ 60Hz, <1.5A		
Power consumpt	ion	17W		
Operating tempe	erature	0 − 50 ℃		
Store temperatu	re	-20 − 60 °C		
Humidity		0 – 80% RH, non-condensing		
Net weight		12.5 kg		
Product dimension	on (W × D × H)	448mm×505mm×42.5mm		
Package dimensi	on (W × D × H)	765mm×615mm×185mm		