

# 2 Port HDMI KVM Switch with Audio

## HD1102




## Overview

2 port HDMI KVM Switches allows you to control up to 2 computers from a single console (keyboard, mouse and monitor). Switch between computers with hot keys, port selection buttons or mouse. Plug-and-play setup does not require software installation.

## Product Features

- One HD1102 controls 2 HDMI computers or HDMI devices
- Support audio
- Support USB2.0 HUB
- Multiplatform support – Windows , Linux, Mac, Unix
- Easy switching between PCs via front panel pushbuttons, keyboard hotkeys
- Hot pluggable – add or remove computers without having to power down the switch
- Superior resolution - 3840×2160 @ 60 Hz
- Supports widescreen resolutions

## Connection Diagram

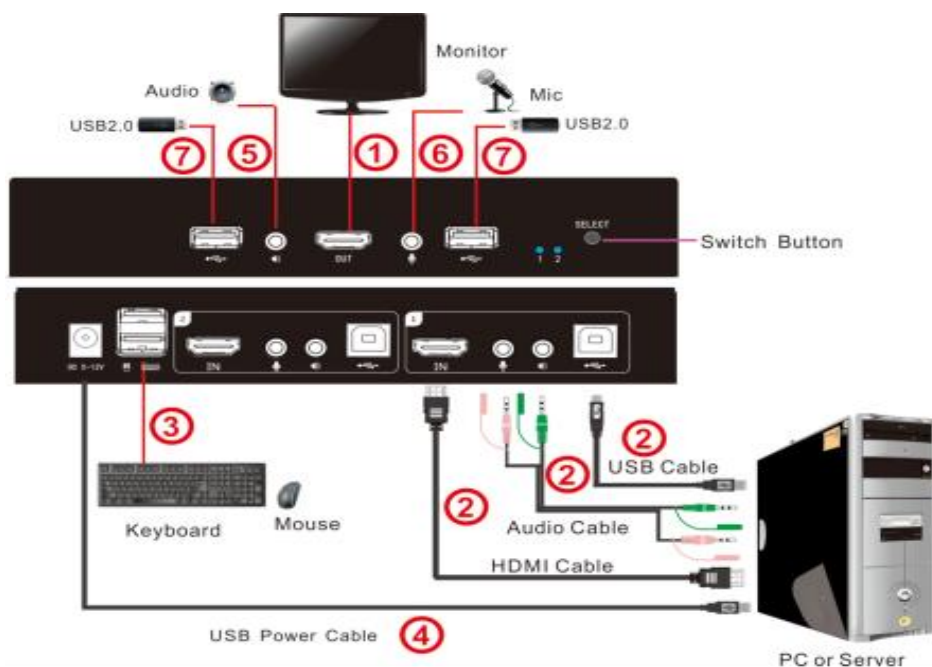

## Specifications

Model			HD1102
Computer Connection			2
Port Selection			Hotkey, button
Connector	Console	Monitor	1x HDMI Type A
		Keyboard Mouse	1x double layer USB type A
		Mic	1x Min stereo port (pink)
		Speaker	1x Min stereo port (green)
	PC	Monitor	2x HDMI Type A
		Keyboard Mouse	2x USB type B
		Mic	2x Min stereo port (pink)
		Speaker	2x Min stereo port (green)
	USB2.0 port		2x USB type A
	Power		1x DC socket
Switch		Port Selection	1x button
LEDs		Selected	2 (Blue)
Resolution			3840×2160 @ 60 Hz
Power Consumption			2W
Power Input			5V- 12V DC
Operating Temperature			0 ~ 50 °C
Storage Temperature			-20 ~ 60°C
Humidity			0~80% RH, non-condensing
Net Weight			0.4kg
Dimension (W × D × H)			185mm × 74mm × 32.5mm